
E9.9D
E15D

ENDURO Gasoline

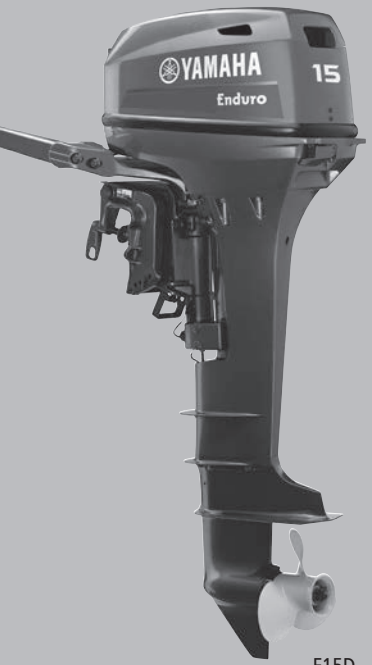

E15D

MODEL CODE
(Approved code)

E9.9D	6B3 (6B3K)
E15D	6B4 (6B4K)

MODELS AVAILABLE

Tiller Handle	
E9.9D	MH
E15D	MH

Dry weight

E9.9D	38 – 40 kg
E15D	38 – 41 kg

SPECIFICATIONS

Performance	E9.9D	E15D
Max. prop shaft output	7.3 kW (9.9 ps)	11.0 kW (15 ps)
Full throttle operating range	4500 – 5500 r/min	
Idling speed	1000 – 1100 r/min	
Fuel consumption	6.9 L/h @5500 r/min	7.7 L/h @5500 r/min

Engine	
Engine type	In-line 2
Displacement	246 cm^3
Bore × stroke	56.0 × 50.0 mm
Compression ratio	7.0 :1
Starting enrichment	Manual choke
Scavenging	Loop charge
Fuel induction system	1 carburetor
Lubrication system	Pre-mixed fuel and oil
Oil - fuel mixing ratio	50 :1
Engine oil capacity	—
Ignition system	CDI
Ignition timing	TDC – BTDC 30.0 deg.
Spark plug	B8HS-10
Alternator	80 W (optional)
Cooling system	Raw-water, thermostatically controlled
Exhaust system	Through propeller boss

Bracket / Drive		
Trim	4 positions	
Shallow water drive	1 position	
Steering angle	40 deg. each direction	
Gear shift	F-N-R	
Gear ratio	2.08 (27/13)	
Gear oil capacity	0.220 L	
Propeller fitting	Spline	
Propeller rotation	Clockwise	
Shaft length	S, L	S, L, X
Engine transom height	S : 441 mm (17.4 in), L : 568 mm (22.4 in), X : 710 mm (30.3 in)	

FEATURE TABLE

CATEGORY	FEATURE ITEM	E9.9D MH	E15D MH
Security	Start in gear protection	●	●
	Engine stop switch lanyard	●	●
	Over rev. limiter	—	—
	Overheat warning	—	—
Corrosion prevention	Stainless steel water pump housing	—	—
	Chrome plated water pump housing	●	●
	Stainless steel water tube	—	—
	Multiple anode	●	●
	Single large anode	—	—
Power unit	Carburetor	●	●
	Gasoline [Regular]	●	●
Control	Instruments (electric start model)	—	—
	Remote control (electric start model)	—	—
Convenience	Carrying handle	—	—
	360 deg. full pivot steering	—	—
	Shallow water drive	●	●

OPTIONAL ACCESSORY GUIDE

OPTIONAL ACCESSORY	E9.9D MH	E15D MH
Lighting coil	●	●
Portable fuel tank	●	●
Spark plug	●	●

PROPELLER	E9.9D MH	E15D MH
Standard propeller	J	J
	J1	J1
• Traditional propeller	—	—
• Weedless propeller	—	—
• Dual thrust propeller	J	J

CONSUMES	E9.9D MH	E15D MH
Yamalube 2, 2M	●	●
Yamalube gear oil (GL4)	●	●
Yamaha grease A	●	●
Yamaha grease D	●	●

— : N/A (Not available)